

TRASSAR[®] 201

Machine for road and motorway markings

- Versatile and easy to handle
- High productivity
- Long operating time, irrespective of the paint and application method used


Areas of application:



Types of marking: line markings and specialised works

Application technique: airless

Applicable products: paints and two-component products (liquid/solid)

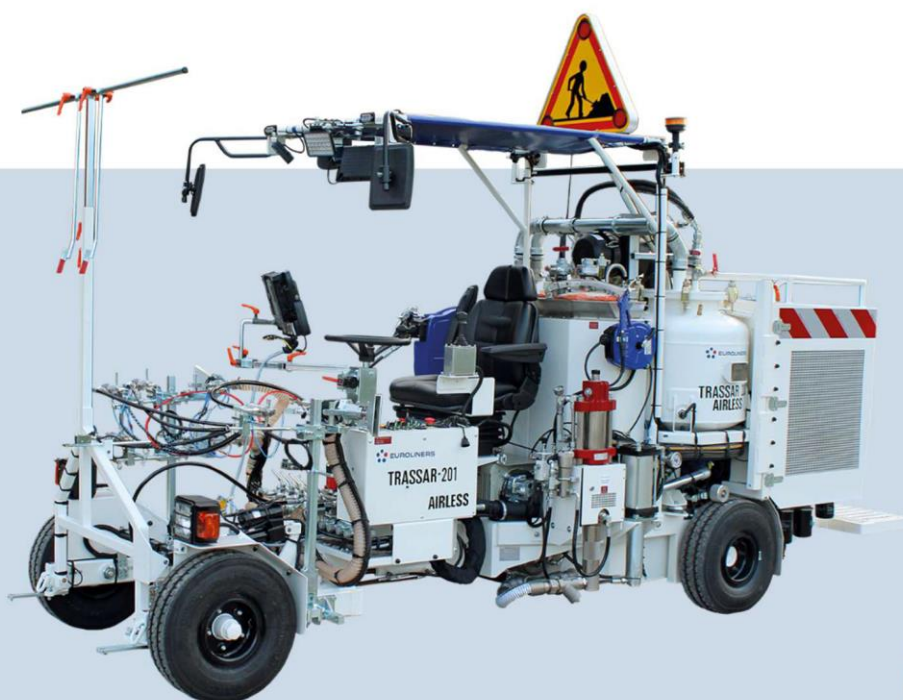

400 kg paint
400 kg beads

2,000 sq. metres applied
per day on average

Ergonomic design
Operating cost
Reliability/Quality

ERGONOMIC DESIGN & VERSATILITY

- **Articulated chassis for easier marking applications** on winding roads
- Width of 1.35 m **to minimise any inconvenience for road users**
- Ergonomically designed cockpit with access to all the controls and full peripheral visibility, **in compliance with "movements & postures" requirements** for improved user **comfort**
- **TOTAL visibility** of the centre and edge line markers from the cockpit for **easier application**
- Wide range of adaptable options to create a truly **custom-designed machine**, including markers, manual spray gun, pre-marking arm, product filling pumps, and lights
- **Total access** to components requiring maintenance (engine, paint pump, filters, etc.) **with the fully opening cowling**

PERFORMANCE / OPERATING COST / DURABILITY

- **Modular and scalable** machine
- Components from **leading brands** to guarantee **reliability, robust and durable** equipment
- Separable paint and glass bead tanks for **using different colours and products**
- Suction circuit for drawing paint into a separate container **to avoid cleaning** tanks when using a **coloured product**
- **Extended engine maintenance intervals** (oil change every 500 hours or once a year)

SUSTAINABLE DEVELOPMENT / ENVIRONMENT

- Over **96% recyclable**
- Machine designed for use with **water-based** paints, which are highly recommended as an alternative to harmful solvent-based paints, to help **decarbonise road marking operations**

Extra product + benefits:

Internal combustion engine with a **particulate filter** meeting applicable **environmental standards**

SPECIFICATIONS



Paint tanks	2 x 135 litres (2 x 200 kg)
Bead tanks	2 x 130 litres (2 x 200 kg)
Airless paint pump flow rate	15 litres/min
Internal combustion engine power	43.7 kW / 58.6 hp
Unladen / laden weight	2,100 kg / 2,900 kg